

## SUSTAINABLE PRODUCTION POLICIES UNDER THE EFFECT OF VOLUME AGILITY, PRESERVATION TECHNOLOGY, AND PRICE-RELIANT DEMAND

Prerna GAUTAM

*Department of Operational Research, Faculty of Mathematical Sciences,  
New Academic Block, University of Delhi, India  
prerna3080@gmail.com*

KM KAMNA\*

*Department of Operational Research, Faculty of Mathematical Sciences,  
New Academic Block, University of Delhi, India  
kamnarajput.du.or@gmail.com*

Chandra K. JAGGI

*Department of Operational Research, Faculty of Mathematical Sciences,  
New Academic Block, University of Delhi, India  
ckjaggi@yahoo.com*

Received: May 2019 / Accepted: August 2019

**Abstract:** Any supply chain supposes production and pricing decisions. The most influential factor that affects a sales decision is the price of a product, which in turn, affects the configuration of the demand. Further, holding the produced goods means also the occurrence of deterioration as a common phenomenon, which may lead to excessive loss if left untreated. Thus, an investment in preservation process helps in controlling deterioration efficiently. Moreover, incorporation of the environmental factor presents the need of the hour in the current situation of environmental imbalance. To address the above issues, we consider volume agility to avoid any excessive storage and backloging costs, carbon-emissions and energy-usage to address the performance of our model regarding the environment, and investment in preservation process to control the loss due to deterioration. Also, the demand of the product is taken as price-reliant. The investment in

---

\*Corresponding Author. Tel-Fax: 91-11-27666672, email: [kamnarajput.du.or@gmail.com](mailto:kamnarajput.du.or@gmail.com)

preservation, production rate, and price of the product are taken as the decision variables so as to maximize the total inventory turnover. Validity and robustness of the model is analyzed through numerical and sensitivity analysis. A wide-ranging applicability of the developed study is also provided.

**Keywords:** Inventory, Production, Volume agility, Deterioration, Preservation technology, Energy usage, Price-reliant demand, Carbon-emissions.

**MSC:** 90B05, 90B30.

## 1. INTRODUCTION

In manufacturing systems, the constant production rate has been explicitly assumed by numerous researchers. Such an assumption holds only if the demand of a product is known with certainty. However, with constant changes in the markets and recent trends, the demand of a product fluctuates in the long run, which may lead to shortages or high storage costs, depending upon the rise or fall. Thus, volume agility is an effective tool to deal with this situation efficiently. [46] put forth a pioneer research by introducing a theory on agility in the manufacturing process. Further, the impact of flexible production rate on various production models has been studied by [33], [31], and [32], etc. [43] investigated a scenario for a decaying product under the assumption of flexible production rate. Later, [42] explored the optimum policy for a decaying product with volume agility where the demand is assumed to be dependent on inventory level. Then, [41] studied a manufacturing system with faulty products along with volume agility. [50] examined the effect of inflation in a defective manufacturing scenario and flexible production. [51] inspected an ordering model with volume agility, variable demand, and inflation. [14] also formulated a model with flexible production rate. [13] studied an ordering system with multiple items and greening under the assumption of flexible production rate. [44] modeled a two-warehouse vendor-supplier framework with volume agility.

The growing concern towards the environment enabled researchers to implement the realistic features such as carbon-emissions and energy usage in their modeling, caused largely by customers' awareness and the sustainability aspect of business. Various researchers incorporated energy usage viz. [6], [5], [35], etc. [36] presented a supply-chain model with carbon-footprints, energy consumption, and imperfect process. In the same year, [34] developed a production model with learning in the manufacturing process and energy efficiency.

Further, the environment experts are signifying the importance of green strategies as they are beneficial in both ways, economically and environmentally. [15], [45], [49] studied carbon footprints in their respective inventory modeling. Lately, [20] constructed a sustainable and integrated supply chain model with an investment in setup cost along with harmful carbon emissions. Recently, [21] put forth a sustainable supply chain scenario with features like defect management, carbon-emissions, and more. In the same year, [11] proposed a three tier supply chain model with deteriorating items and carbon-emissions, and [4] studied the reduced

impact of carbon-emissions in the supply chain with vendor managed inventory of deteriorating items.

The inventory reduction caused by deterioration cannot be overlooked in an inventory system. The presence of deterioration affects the revenue and thereby decreases the total profit of the system. The foremost research in this area was given in [22]. Later, [12], [55], [7], [23], [25], etc. analyzed the topic in detail. Some models with constant and Weibull deterioration rate were also developed by [37], [47], etc. If the products are prone to deterioration, they require a special care to be handled and the due loss to be minimized. In this regard, preservation technology is an efficient strategy to minimize the loss occurred due to deterioration. [27], [17], [18], [51], and [58] to mention a few. Freshly, in [30], [24], and [19], this field has been explored under various assumptions. Lately, [40], studied the preservation technology model for deteriorating items with trade-credit. From the above-mentioned studies, it can be observed that the effect of preservation technology along with volume agility on optimal policies has not been studied yet.

The demand in its nature is always price sensitive. So, determination of a selling price is the most crucial decision of any business. Various researchers studied different natures of demand. Its price-sensitive nature was explored by [1], [2], [39], [3], [8], [16], [10], and [9] under various other practical settings like deterioration, partial backordering, credit period, lead time considerations, etc. The demand depending upon both the price and stock was explored by [38]. However, the demand depending upon the price and time was studied by [56], [54], etc. Later, [57] developed a dynamic pricing model for seasonal goods under spot and forward purchase demand pattern. [53] investigated a supply chain scenario under stochastic demand environment. Lately, [29] developed an inventory scenario with mark-up price reliant demand for products of imperfect quality under credit-policies, shortages, and deterioration.

Our model has the following research questions and highlights:

- How the preservation strategies assist in controlling the deterioration rate?
- The basic nature of demand is considered as price-sensitive.
- The rate of production is assumed to be variable, thus, the concept of volume agility is implemented.
- What is energy usage? How is it implemented in the production scenario?
- The environmental aspect is considered through the incorporation of carbon-emission while production and storage of goods.
- What will be the optimum production rate, investment in preservation technology, and selling price under the proposed production policy?
- What will be the behavior of the model under changing parameters?

The present framework fulfills the current literature gap by proposing a production inventory model for decaying items. The product's demand is supposed to be price-reliant. Further, the production rate is not constant, instead, the concept of volume agility is incorporated. An investment in preservation strategy is considered to curb the loss due to deterioration. The environmental aspect of

the business is also showcased through the consideration of carbon-emissions and energy consumptions costs.

## 2. NOTATIONS AND ASSUMPTIONS

### 2.1. Notations

$t_1$	= time where the production stops (weeks)
$T$	= time where the inventory cycle ends (weeks)
$h_1$	= storage cost of the item (\$/unit/unit time)
$d_1$	= deterioration cost of the item (\$/unit/unit time)
$K$	= setup cost per order
$\xi$	= material cost per unit (fixed)
$\omega$	= labour cost
$\varpi$	= tool/die cost
$\delta(\psi)$	= rate of deterioration with preservation technology (units/ unit time), ( $\delta(\psi) = y_0 e^{-u\psi}$ )
$y_0$	= rate of deterioration when investment in preservation strategy is zero (units/ unit time)
$u$	= the sensitive parameter of preservation technology investment to the deterioration rate ( $0 < u < 1$ )
$\lambda(S)$	= rate of demand as a function of selling price ( $\lambda(S) = \alpha - \beta S$ ) (units/unit time)
$\alpha$	= demand scale
$\beta$	= price sensitive parameter
$\gamma$	= idle power for the manufacturing process in the start position (kW)
$j$	= variable component of the power, a constant (kWh/unit)
$b_1$	= energy cost
$e_p$	= carbon emission cost in production
$e_h$	= carbon emission cost in holding

### Decision variable

$\psi$	= cost of preservation technology investment (\$/unit/unit time)
$P$	= production rate
$S$	= selling price (\$/unit)

### 2.2. Assumptions

1. The model considers only a single item.
2. The lead time is zero and backlogging is not allowed.
3. The rate of demand  $\lambda(S)$  is a function of sales price  $S$ :

$$\lambda(S) = \alpha - \beta S$$

where  $\alpha$  is the demand scale, and  $\beta$  is price sensitive parameter.

4. The production rate  $P$  is flexible, where  $P$  is greater than demand rate.
5. The unit production cost  $\chi(P) = (\xi + \frac{\omega}{P} + \varpi P)$  where  $\xi, \omega, \varpi$  are all positive constants. The production cost/unit ( $\frac{\omega}{P}$ ) tends to decrease as rate of production ( $P$ ) increases. Further, the last term ( $\varpi P$ ) related to the tool/die costs is proportionate with respect to production rate.
6. The proportion of reduced deterioration rate after using investment in preservation strategy is  $\delta(\psi) = y_0 e^{-u\psi}$ , and this function satisfies the following conditions  $\delta'(\psi) > 0, \delta''(\psi) < 0$  and  $\delta(0) = y_0$ .

### 3. MATHEMATICAL MODEL

The proposed scenario is depicted in Figure 1. The cycle begins at time zero with no inventory and rises till  $t_1$  at rate  $P$  and concurrently reduces due to demand and deterioration. During  $(t_1, T)$ , the inventory diminishes only due to demand rate and deterioration. The deterioration rate is being skillfully taken care of by an investment in preservation policy. Finally, the inventory exhausts at time  $T$ .

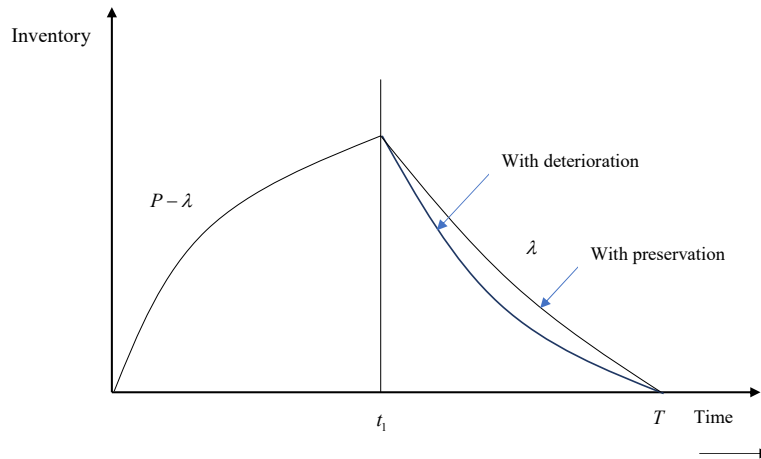


Figure 1: Inventory representation

During the time interval  $(0, t_1)$

$$\frac{dI_1(t)}{dt} + \delta(\psi)I_1(t) = P - \lambda(S), \quad 0 \leq t \leq T_1 \tag{1}$$

Using  $I_1(0) = 0$ , the solution of Eq. (1) is

$$I_1(t) = \frac{(P - \lambda(S))}{\delta(\psi)}(1 - e^{\delta(\psi)t}) \tag{2}$$

During  $(t_1, T)$ , the inventory equation is depicted as:

$$\frac{dI_2(t)}{dt} + \delta(\psi)I_2(t) = -\lambda(S), \quad t_1 \leq t \leq T \quad (3)$$

Using  $I_2(T) = 0$ , the solution of Eq. (3)

$$I_2(t) = \frac{\lambda(S)}{\delta(\psi)}(e^{\delta(\psi)(T-t)} - 1) \quad (4)$$

Now put  $t = t_1$  in Eq. (2) and (4) we have

$$t_1 = \frac{1}{\delta(\psi)} \ln \left[ 1 + \frac{\lambda(S)}{P} (e^{\delta(\psi)T} - 1) \right] \quad (5)$$

The different components are:

- Set-up cost

$$SC = K \quad (6)$$

- Storage cost  $HC$

$$\begin{aligned} HC &= h_1 \left[ \int_0^{t_1} I_1(t) dt + \int_{t_1}^T I_2(t) dt \right] \\ &= \frac{h_1}{\delta(\psi)^2} \{ [(P - \lambda(S))(t_1\delta(\psi) + e^{-\delta(\psi)t_1} - 1)] \\ &\quad + [\lambda(S)(e^{\delta(\psi)(T-t_1)} - 1 - (T - t_1)\delta(\psi))] \} \end{aligned} \quad (7)$$

- Deterioration cost  $DC$

$$\begin{aligned} DC &= d_1\delta(\psi) \left[ \int_0^{t_1} I_1(t) dt + \int_{t_1}^T I_2(t) dt \right] \\ &= \frac{d_1}{\delta(\psi)} \{ [(P - \lambda(S))(t_1\delta(\psi) + e^{-\delta(\psi)t_1} - 1)] \\ &\quad + [\lambda(S)(e^{\delta(\psi)(T-t_1)} - 1 - (T - t_1)\delta(\psi))] \} \end{aligned} \quad (8)$$

- Preservation cost

$$PC = \psi \cdot T \quad (9)$$

- Production cost  $PC$

$$\begin{aligned} PC &= \left( \xi + \frac{\omega}{P} + \varpi P \right) \int_0^{t_1} P dt \\ &= Pt_1 \left( \xi + \frac{\omega}{P} + \varpi P \right) \end{aligned} \quad (10)$$

In order to obtain the energy costs, we define

$$\eta = \gamma + j.P \tag{11}$$

where  $j$  is fixed (kWh/unit) derived from the behavior of the manufacturing system (see [26]).

From (11), the specific energy usage /unit of treated material is (see [36]):

$$SEC = \frac{(\gamma + j.P)t_P}{P.t_P} \tag{12}$$

- Energy cost

$$EC = b_1(SEC.\lambda(S)) \tag{13}$$

- Carbon emission cost in production

$$CP = e_p.P.t_1 \tag{14}$$

- Carbon emission cost in holding

$$\begin{aligned} CH &= e_h \left[ \int_0^{t_1} I_1(t) dt + \int_{t_1}^T I_2(t) dt \right] \\ &= \frac{e_h}{\delta(\psi)^2} \{ [(P - \lambda(S))(t_1\delta(\psi) + e^{-\delta(\psi)t_1} - 1)] \\ &\quad + [\lambda(S)(e^{\delta(\psi)(T-t_1)} - 1 - (T - t_1)\delta(\psi))] \} \end{aligned} \tag{15}$$

- Total Revenue

$$TR = \lambda(S) \bullet T \bullet S \tag{16}$$

- Total profit

$$\begin{aligned} TP &= [TR - (SC + HC + DC + P_C + PC + EC + CP + CH)] \\ &= \frac{\lambda(S)TS}{T} - \left( \frac{K}{T} + \frac{(h_1 + e_h)}{T\delta(\psi)^2} \{ [(P - \lambda(S))(t_1\delta(\psi) + e^{-\delta(\psi)t_1} - 1)] \right. \\ &\quad \left. + \lambda(S)(e^{\delta(\psi)(T-t_1)} - 1 - (T - t_1)\delta(\psi)) \} \right) \\ &\quad + \frac{d_1}{T\delta(\psi)} \{ [(P - \lambda(S))(t_1\delta(\psi) + e^{-\delta(\psi)t_1} - 1)] \\ &\quad + \lambda(S)(e^{\delta(\psi)(T-t_1)} - 1 - (T - t_1)\delta(\psi)) \} \\ &\quad + \psi + \frac{Pt_1}{T} \left( \xi + \frac{\omega}{P} + \varpi P \right) + \frac{b_1(SEC.\lambda(S))}{T} + \frac{e_p.P.t_1}{T} \end{aligned} \tag{17}$$

$$\begin{aligned}
 &= \lambda(S)S - \frac{(h_1 + e_h)}{T} \left[ (P - \lambda(S)) \left( \frac{t_1^2}{2} \right) + \frac{\lambda(S)(T - t_1)^2}{2} \right] \\
 &\quad - \frac{d_1}{T} \left[ \frac{(P - \lambda(S)) t_1^2 \delta(\psi)}{2} + \frac{\lambda(S) \delta(\psi) (T - t_1)^2}{2} \right] \\
 &\quad - \frac{K}{T} - \alpha - \frac{Pt_1}{T} \left( \xi + \frac{\omega}{P} + \varpi P \right) \\
 &\quad + b_1 \frac{(\gamma + j.P)t_P}{P.t_P.T} . \lambda(S) + \frac{e_p.P.t_1}{T}
 \end{aligned} \tag{18}$$

**Solution procedure**

Now, to establish the optimality of equation (13), the necessary condition satisfied these equations:

$$\frac{\partial TP(S, \psi, P)}{\partial S} = 0 \tag{19}$$

$$\frac{\partial TP(S, \psi, P)}{\partial P} = 0 \tag{20}$$

$$\frac{\partial TP(S, \psi, P)}{\partial \psi} = 0 \tag{21}$$

The sufficient conditions for maximize the total profit are  $H_1 < 0$ ,  $H_2 > 0$ ,  $H_3 < 0$ , the hessian matrix  $H$  is estimated as:

$$H = \begin{bmatrix} \frac{\partial^2 TP}{\partial \psi^2} & \frac{\partial^2 TP}{\partial \psi \partial S} & \frac{\partial^2 TP}{\partial \psi \partial P} \\ \frac{\partial^2 TP}{\partial S \partial \psi} & \frac{\partial^2 TP}{\partial S^2} & \frac{\partial^2 TP}{\partial S \partial P} \\ \frac{\partial^2 TP}{\partial P \partial \psi} & \frac{\partial^2 TP}{\partial P \partial S} & \frac{\partial^2 TP}{\partial P^2} \end{bmatrix}$$

and

$$\begin{aligned}
 H_1 &= \frac{\partial^2 TP}{\partial \psi^2}, \\
 H_2 &= \begin{vmatrix} \frac{\partial^2 TP}{\partial \psi^2} & \frac{\partial^2 TP}{\partial \psi \partial S} \\ \frac{\partial^2 TP}{\partial S \partial \psi} & \frac{\partial^2 TP}{\partial S^2} \end{vmatrix}
 \end{aligned}$$



$$H_3 = \det H = \begin{vmatrix} \frac{\partial^2 TP}{\partial \psi^2} & \frac{\partial^2 TP}{\partial \psi \partial S} & \frac{\partial^2 TP}{\partial \psi \partial P} \\ \frac{\partial^2 TP}{\partial S \partial \psi} & \frac{\partial^2 TP}{\partial S^2} & \frac{\partial^2 TP}{\partial S \partial P} \\ \frac{\partial^2 TP}{\partial P \partial \psi} & \frac{\partial^2 TP}{\partial P \partial S} & \frac{\partial^2 TP}{\partial P^2} \end{vmatrix}$$

where  $H_1$ ,  $H_2$ , and  $H_3$  are the minors of the Hessian matrix  $H$ .

Due to the extremely non-linear nature of the profit function, the sufficient condition can not be proven mathematically, thereby graphical method is employed to establish concavity and is represented in Figures 2, 3, and 4 with the help of Mathematica.

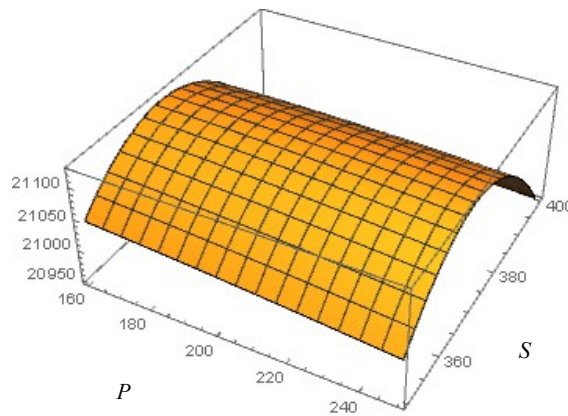


Figure 2: Concavity for profit vs.  $P$  and  $S$

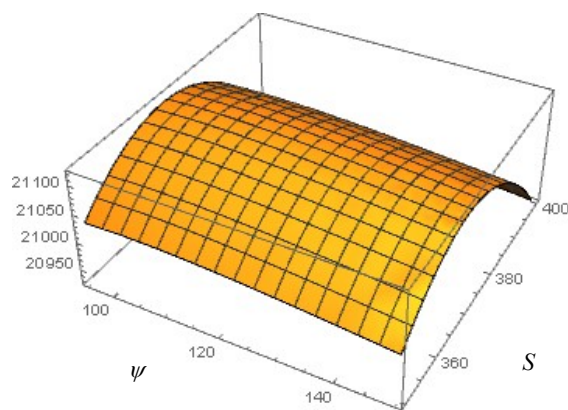


Figure 3: Concavity for profit vs.  $\psi$  and  $S$

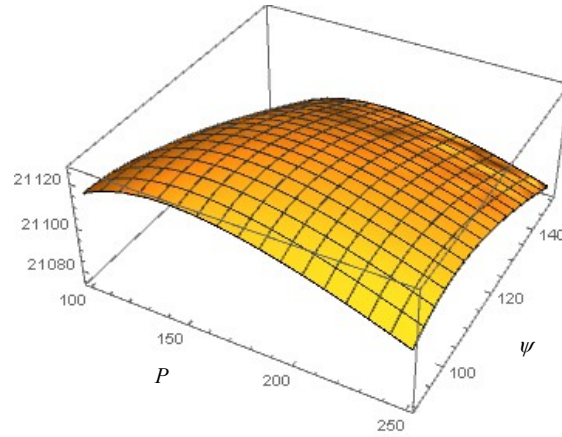


Figure 4: Concavity for profit vs.  $\psi$  and  $P$

### Numerical Example

The developed model is demonstrated using a numerical example. The following parameter values are taken in appropriate units for the numerical illustration:  $u = 0.05$ ,  $y_0 = 0.05$ ,  $h_1 = 1.5$ ,  $\xi = 25$ ,  $\omega = 1300$ ,  $\varpi = 0.008$ ,  $K = 600$ ,  $\alpha = 140$ ,  $\beta = 0.2$ ,  $d = 250$ ,  $T = 11$ ,  $\gamma = 100$ ,  $j = 10$ ,  $e_p = 3$ ,  $e_h = 1.5$ ,  $b_1 = 0.15$ .

The following optimal results are obtained:

**Total profit = 21096.05, Production rate = 191.56, Selling price = 371.36, investment in preservation technology = 103, Production time = 3.78**

### Sensitivity Analysis

		$t_1$ (production time)	$\psi$ (investment in preservation)	$P$ (production rate)	$S$ (selling price)	Total profit
$\alpha$ (demand scale)	120	2.5817	102.77	236.71	322.56	15036.15
	130	3.0974	103.23	215.43	347.02	17938.12
	140	3.7784	103.00	191.56	371.36	21096.05
	150	4.7783	101.47	163.41	395.44	24511.76
	160	6.7976	94.97	123.51	418.73	28189.52
$\beta$ (price sensitive)	0.16	3.9191	102.86	187.14	458.72	27202.92
	0.18	3.8476	102.93	189.37	410.18	23809.18
	0.20	3.7784	103.00	191.56	371.36	21096.05
	0.22	3.7106	103.06	193.74	339.60	18877.93
	0.24	3.6447	103.11	195.91	313.15	17031.08

Table 1:

- The increase in the demand scale parameter ( $\alpha$ ) increases the demand (see Table 1). Thus, higher number of units are required to be produced in order to meet the demand, which eventually increases the production time along with the decrease in the production rate. Also, due to increase in demand, the movement of goods will be fast, thus, the deterioration will be reduced, hence, the investment in preservation process is also reduced. High demand implies higher sales, thus profit is increasing. To make the best out of this condition, the price of a product can be increased to fetch higher profits.

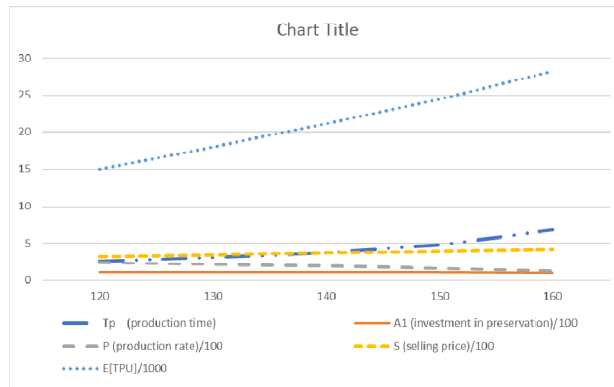


Figure 5: Sensitivity with respect to  $\alpha$

- An upsurge in price-sensitive parameter ( $\beta$ ) of demand reduces the total profit due to the negative aspect of  $\beta$  on demand (see Table 1). Further, due to decreased sales, the accumulated inventory will deteriorate, thus, investment in preservation will be increased. The decision makers may give some lucrative offers to the customers in order to boost sales.

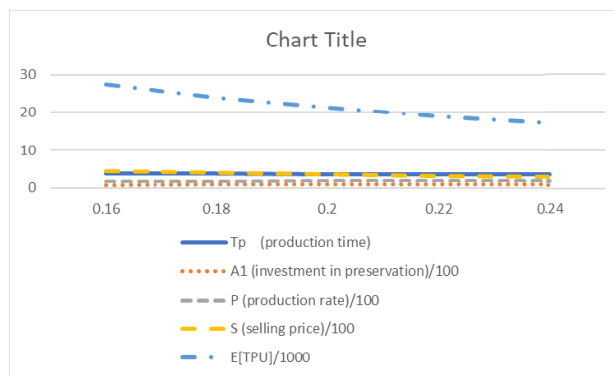


Figure 6: Sensitivity with respect to  $\beta$

		$t_1$	$\psi$	$P$	$S$	Total profit
$u$ (sensitive parameter of preservation)	0.01	-	-	-	-	-
	0.03	3.9273	153.97	184.45	371.30	21031.21
	0.05	3.7784	103.00	191.56	371.36	21096.05
	0.07	3.7216	78.49	194.41	371.38	21126.41
	0.09	3.6903	63.89	196.02	371.39	21144.24

Table 2:

- A rise in the sensitive parameter of preservation ( $u$ ) increases the effectiveness of the preservation technology even if lesser is invested in it, thus, investment is decreasing (see Table 2). The decision-makers may increase the production rate so as to take benefit of this situation. In accordance with this, the total profit increases.

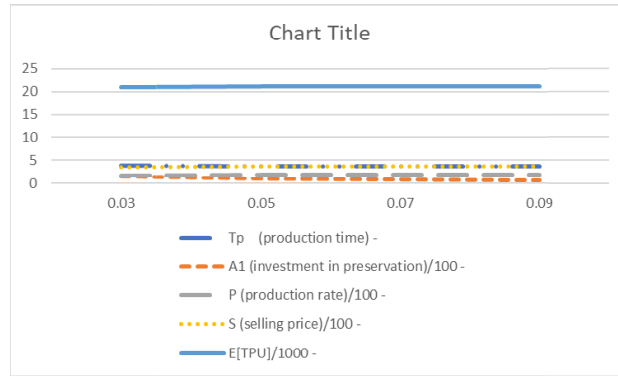


Figure 7: Sensitivity with respect to  $u$

		$t_1$	$\psi$	$P$	$S$	Total profit
$e_p$ (emission in production)	0.8	3.8135	102.82	190.45	370.22	21241.06
	1	3.8108	102.83	190.52	370.63	21227.85
	3	3.7784	103.00	191.56	371.36	21096.05
	5	3.7465	103.17	191.58	372.39	20964.66
	7	3.7152	103.33	193.59	373.42	20833.69
$e_h$ (emission in holding)	1.1	3.0894	104.81	234.26	371.38	21196.06
	1.3	3.3805	104.07	214.05	371.43	21144.94
	1.5	3.7784	103.00	191.56	371.36	21096.05
	1.7	4.3765	101.28	165.52	371.07	21050.34
	1.9	5.4807	97.65	132.49	370.28	21009.85

Table 3:

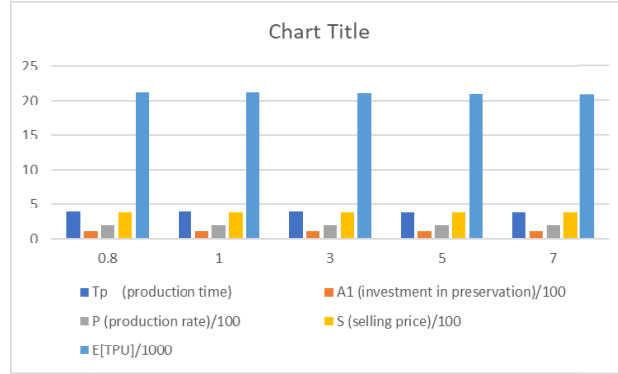


Figure 8: Sensitivity with respect to  $e_p$

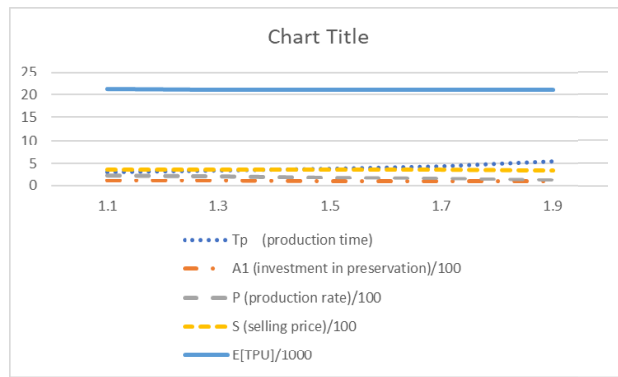


Figure 9: Sensitivity with respect to  $e_h$

- The carbon-emission costs increase when production and storage of goods result in decreasing the total profits (see Table 3). Further, for such a situation it is necessary to monitor the demand so as to produce only the requisite quantity and avoid emissions during production and holding of goods.

		$t_1$	$\psi$	$P$	$S$	Total profit
$b_1$ (cost of energy)	0.05	4.4179	101.15	164.25	370.50	21121.77
	0.10	4.0561	102.23	178.65	370.97	21108.38
	0.15	3.7784	103.00	191.56	371.36	21096.05
	0.20	3.5553	103.61	203.37	371.69	21084.56
	0.25	3.3700	104.10	214.37	371.97	21073.74

Table 4:

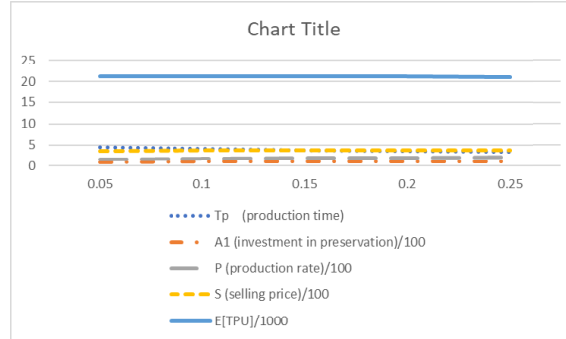


Figure 10: Sensitivity with respect to  $b_1$

- A rapid manufacturing boost the energy consumption and related carbon-footprints. Further, when the energy cost increases, the total profit of the system decreases (see Table 4). For such a case it is suggested that a bigger lot size with a lower speed can assist in reducing the energy usage.

		$t_1$	$\psi$	$P$	$S$	Total profit
$\omega$ (labour cost)	1200	4.7269	100.17	153.56	370.41	21134.2
	1250	4.1697	101.88	173.79	370.94	21114.07
	1300	3.7784	103.00	191.56	371.36	21096.05
	1350	3.4820	103.81	207.65	371.69	21079.58
	1400	3.2469	104.44	222.49	371.97	21064.3
$\varpi$ (tool/die cost)	0.004	2.6601	105.84	271.82	371.82	21155.2
	0.006	3.2648	104.36	221.59	371.51	21123.09
	0.008	3.7784	103.00	191.56	371.36	21096.05
	0.010	4.2346	101.71	170.99	371.22	21072.27
	0.012	4.6518	100.46	155.71	371.09	21050.81

Table 5:

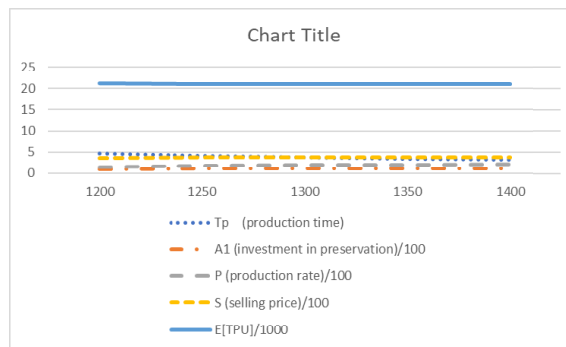


Figure 11: Sensitivity with respect to  $\omega$

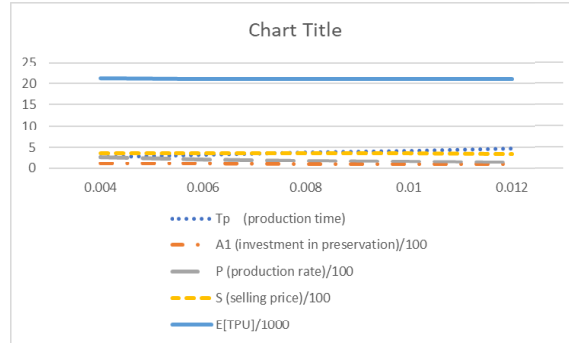


Figure 12: Sensitivity with respect to  $\varpi$

- The costs linked with production system affect the overall system costs significantly. When the labour cost increases, the production time duration decreases, and the rate of production is increased. The total profit decreases slightly (see Table 5).
- When the tool/die cost increases, production time increases, however, the rate of production decreases. The total turnover decreases considerably (see Table 5).

#### 4. CONCLUSION

Environmental issues can be addressed in a sustainable way by adopting green techniques in the manufacturing world. It is important to implement the environmental factors such as carbon-emissions during production & storage of goods, energy usage while production, etc., so as to give a model that fits the current need of economic and environmental crisis. Hence, we developed a production model with items of deteriorating quality and demand being price-sensitive with volume agility, and considered investment in preservation technology to deal with deterioration. The incorporation of volume agility enables manufacturers to manage fluctuating demand efficiently. Also, we took the environmental aspects into consideration by implementing the carbon-emissions and energy usage during the production process. Numerical and sensitivity analysis are performed for structuring the model features and to impart useful managerial insights. A valuable contribution of the developed model could be made by executing non-instantaneous deterioration. Further, the presence of imperfect quality items and disruption can also be accounted in the manufacturing process.

**Acknowledgement:** The authors would like to thank the anonymous reviewers and the editor for their valuable comments, which has greatly helped us in improving the manuscript.

## REFERENCES

- [1] Abad, P.L., “Optimal pricing and lot-sizing under conditions of perishability and partial backordering”, *Management Science*, 42 (8) (1996) 1093–1104.
- [2] Abad, P.L., “Optimal price and order size for a reseller under partial backordering”, *Computers & Operations Research*, 28 (1) (2001) 53–65.
- [3] Abad, P.L., and Jaggi, C.K., “A joint approach for setting unit price and the length of the credit period for a seller when end demand is price sensitive”, *International Journal of Production Economics*, 83 (2) (2003) 115–122.
- [4] Bai, Q., Jin, M., and Xu, X., “Effects of carbon-emission reduction on supply chain coordination with vendor-managed deteriorating product inventory”, *International Journal of Production Economics*, 208 (2019) 83–99.
- [5] Biel, K., and Glock, C.H., “Systematic literature review of decision support models for energy-efficient production planning”, *Computers & Industrial Engineering*, 101 (2016) 243–259.
- [6] Bunse, K., Vodicka, M., Schönsleben, P., Brühlhart, M., and Ernst, F.O., “Integrating energy efficiency performance in production management-gap analysis between industrial needs and scientific literature”, *Journal of Cleaner Production*, 19 (6-7) (2011) 667–679.
- [7] Chakrabarti, T., and Chaudhari, K.S., “An EOQ model for deteriorating items with a linear trend in demand and shortages in all cycles”, *International Journal of Production Economics*, 49 (3) (1997) 205–213.
- [8] Chang, H.J., Teng, J.T., Ouyang, L.Y., and Dye, C.Y., “Retailer’s optimal pricing and lot-sizing policies for deteriorating items with partial backlogging”, *European Journal of Operational Research*, 168 (1) (2006) 51–64.
- [9] Chao, X., Gong, X., and Zheng, S., “Optimal pricing and inventory policies with reliable and random-yield suppliers: characterization and comparison”, *Annals of Operations Research*, 241 (1-2) (2016) 35–51.
- [10] Chen, H., Chen, Y.F., Chiu, C.H., Choi, T.M., and Sethi, S., “Coordination mechanism for the supply chain with leadtime consideration and price-dependent demand”, *European Journal of Operational Research*, 203 (1) (2010) 70–80.
- [11] Daryanto, Y., Wee, H.M., and Astanti, R.D., “Three-echelon supply chain model considering carbon emissions and item deterioration”, *Transportation Research Part E: Logistics and Transportation Review*, 122 (2019) 368–383.
- [12] Dave, U., and Patel, L.K., “(T, Si) policy inventory model for deteriorating items with time proportional demand”, *Journal of the Operational Research Society*, 32 (2) (1981) 137–142.
- [13] Dem, H., and Singh, S.R., “Joint replenishment modelling of a multi-item system with greening policy and volume flexibility”, *International Journal of Operational Research*, 22 (2) (2015) 148–166.
- [14] Dem, H., Singh, S., and Kumar, J., “An EPQ model with trapezoidal demand under volume flexibility”, *International Journal of Industrial Engineering Computations*, 5 (1) (2014) 127–138.
- [15] Drake, D.F., Kleindorfer, P.R., and Van Wassenhove, L.N., “Technology choice and capacity portfolios under emissions regulation”, *Production and Operations Management*, 25 (6) (2016) 1006–1025.
- [16] Dye, C.Y., “Joint pricing and ordering policy for a deteriorating inventory with partial backlogging”, *Omega*, 35 (2) (2007) 184–189.
- [17] Dye, C.Y., “The effect of preservation technology investment on a non-instantaneous deteriorating inventory model”, *Omega*, 41 (5) (2013) 872–880.
- [18] Dye, C.Y., and Hsieh, T.P., “An optimal replenishment policy for deteriorating items with effective investment in preservation technology”, *European Journal of Operational Research*, 218 (1) (2012) 106–112.
- [19] Dye, C.Y., and Yang, C.T., “Optimal dynamic pricing and preservation technology investment for deteriorating products with reference price effects”, *Omega*, 62 (2016) 52–67.
- [20] Gautam, P., and Khanna, A., “An imperfect production inventory model with setup cost reduction and carbon emission for an integrated supply chain”, *Uncertain Supply Chain Management*, 6 (3) (2018) 271–286.



- [21] Gautam, P., Kishore, A., Khanna, A., and Jaggi, C.K., “Strategic defect management for a sustainable green supply chain”, *Journal of Cleaner Production*, 233 (2019) 226–241.
- [22] Ghare, P.M., and Schrader, G.F., “An inventory model for deteriorating item for exponentially deteriorating items”, *Journal of Industrial Engineering*, 14 (1963) 238–243.
- [23] Giri, B.C., Chakrabarty, T., and Chaudhuri, K.S., “A note on a lot sizing heuristic for deteriorating items with time-varying demands and shortages”, *Computers & Operations Research*, 27 (6) (2000) 495–505.
- [24] Giri, B.C., Pal, H., and Maiti, T., “A vendor-buyer supply chain model for time-dependent deteriorating item with preservation technology investment”, *International Journal of Mathematics in Operational Research*, 10 (4) (2017) 431–449.
- [25] Goyal, S.K., and Giri, B.C., “Recent trends in modeling of deteriorating inventory”, *European Journal of Operational Research*, 134 (1) (2001) 1–16.
- [26] Gutowski, T., Dahmus, J., and Thiriez, A., “Electrical energy requirements for manufacturing processes”, in: *13th CIRP international conference on life cycle engineering*, CIRP International Leuven, Belgium, 31 (1) (2006) 623–638.
- [27] Hsu, P.H., Wee, H.M., and Teng, H.M., “Preservation technology investment for deteriorating inventory”, *International Journal of Production Economics*, 124 (2) (2010) 388–394.
- [28] Khanna, A., Gautam, P., and Jaggi, C.K., “Inventory modeling for deteriorating imperfect quality items with selling price dependent demand and shortage backordering under credit financing”, *International Journal of Mathematical, Engineering and Management Sciences*, 2 (2) (2017) 110–124.
- [29] Khanna, A., Gautam, P., and Jaggi, C.K., “Inventory modeling for deteriorating imperfect quality items with selling price dependent demand and shortage backordering under credit financing”, *International Journal of Mathematical, Engineering and Management Sciences*, 2 (2) (2017) 110–124.
- [30] Khanna, A., Mittal, M., Gautam, P., and Jaggi, C., “Credit financing for deteriorating imperfect quality items with allowable shortages”, *Decision Science Letters*, 5 (1) (2016) 45–60.
- [31] Khouja, M., “The economic production lot size model under volume flexibility”, *Computers & Operations Research*, 22 (5) (1995) 515–523.
- [32] Khouja, M., “The scheduling of economic lot sizes on volume flexible production systems”, *International Journal of Production Economics*, 48 (1) (1997) 73–86.
- [33] Khouja, M., and Mehrez, A., “Economic production lot size model with variable production rate and imperfect quality”, *Journal of the Operational Research Society*, 45 (12) (1994) 1405–1417.
- [34] Marchi, B., Zanoni, S., and Jaber, M.Y., “Economic production quantity model with learning in production, quality, reliability and energy efficiency”, *Computers and Industrial Engineering*, 129 (2019) 502–511.
- [35] Marchi, B., Zanoni, S., Ferretti, I., and Zavanella, L., “Stimulating investments in energy efficiency through supply chain integration”, *Energies*, 11 (4)(2018) 858.
- [36] Marchi, B., Zanoni, S., Zavanella, L.E., and Jaber, M.Y., “Supply chain models with greenhouse gases emissions, energy usage, imperfect process under different coordination decisions”, *International Journal of Production Economics*, 211 (2019) 145–153.
- [37] Mishra, U., “An inventory model for deteriorating items under trapezoidal type demand and controllable deterioration rate”, *Production Engineering*, 9 (3) (2015) 351–365.
- [38] Mo, J., Mi, F., Zhou, F., and Pan, H., “A note on an EOQ model with stock and price sensitive demand”, *Mathematical and Computer Modelling*, 49 (9-10) (2009) 2029–2036.
- [39] Polatoglu, H., and Sahin, I., “Optimal procurement policies under price-dependent demand”, *International Journal of Production Economics*, 65 (2) (2000) 141–171.
- [40] Rathore, H., “A Preservation Technology Model for Deteriorating Items with Advertisement Dependent Demand and Trade Credit”, in book: *Logistic, Supply Chain and Financial Predictive Analytics*, Springer, Singapore (2019) (211-220).
- [41] Sana, S.S., Goyal, S.K., and Chaudhuri, K., “On a volume flexible inventory model for items with an imperfect production system”, *International Journal of Operational Research*, 2(1) (2007) 64–80.
- [42] Sana, S., and Chaudhuri, K.S., “On a volume flexible stock-dependent inventory model”,

- Proceedings-National Academy of Sciences India Section A*, 76(4) (2006) 309–315.
- [43] Sana, S., Chaudhuri, K.S., and Mahavidyalaya, B., “On a volume flexible production policy for a deteriorating item with time-dependent demand and shortages”, *Advanced Modeling and Optimization*, 6 (1) (2004) 57–74.
- [44] Sangal, I., and Gupta, V., “Vendor–Supplier Cooperative Inventory Model with Two Warehouse and Variable Demand Rate Under the Environment of Volume Agility”, in: *Proceedings of Fifth International Conference on Soft Computing for Problem Solving*, Springer, Singapore, Part of the Advances in Intelligent Systems and Computing book series (AISC, volume 437).
- [45] Sarkar, B., Ganguly, B., Sarkar, M., and Pareek, S., “Effect of variable transportation and carbon emission in a three-echelon supply chain model”, *Transportation Research Part E: Logistics and Transportation Review*, 91 (2016) 112–128.
- [46] Sethi, A.K., and Sethi, S.P., “Flexibility in manufacturing: a survey”, *International Journal of Flexible Manufacturing Systems*, 2(4) (1990) 289–328.
- [47] Shah, N.H., “Manufacturer-retailer inventory model for deteriorating items with price-sensitive credit-linked demand under two-level trade credit financing and profit-sharing contract”, *Cogent Engineering*, 2(1) (2015) 1012989.
- [48] Shi, J., Zhang, G., and Lai, K.K., “Optimal ordering and pricing policy with supplier quantity discounts and price-dependent stochastic demand”, *Optimization*, 61(2) (2012) 151–162.
- [49] Shi, Y., Chen, L., Liu, Z., Yan, J., and Hu, J., “Analysis on the carbon emission reduction potential in the cement industry in terms of technology diffusion and structural adjustment: a case study of Chongqing”, *Energy Procedia*, 16 (2012) 121–130.
- [50] Singh, S.R., “Supply Chain Models with Imperfect Production Process and Volume Flexibility Under Inflation”, *The IUP Journal of Supply Chain Management*, 7 (1) (2010) 61–76.
- [51] Singh, S.R., and Sharma, S., “A global optimizing policy for decaying items with ramp-type demand rate under two-level trade credit financing taking account of preservation technology”, *Advances in Decision Sciences*, (2013), Article ID 126385.
- [52] Singh, S.R., Gupta, V., and Bansal, P., “EOQ model with volume agility, variable demand rate, Weibull deterioration rate and inflation”, *International Journal of Computer Applications*, 72 (23) (2013) 1–6.
- [53] Sinha, S., and Sarmah, S.P., “Single-vendor multi-buyer discount pricing model under stochastic demand environment”, *Computers & Industrial Engineering*, 59 (4) (2010) 945–953.
- [54] Tsao, Y.C., and Sheen, G.Y., “Dynamic pricing, promotion and replenishment policies for a deteriorating item under permissible delay in payments”, *Computers & Operations Research*, 35 (11) (2008) 3562–3580.
- [55] Wee, H.M., “A deterministic lot-size inventory model for deteriorating items with shortages and a declining market”, *Computers & Operations Research*, 22 (3) (1995) 345–356.
- [56] You, P.S., “Inventory policy for products with price and time-dependent demands”, *Journal of the Operational Research Society*, 56 (7) (2005) 870–873.
- [57] You, P.S., and Chen, T.C., “Dynamic pricing of seasonal goods with spot and forward purchase demands”, *Computers & Mathematics with Applications*, 54 (4) (2007) 490–498.
- [58] Zhang, J., Liu, G., Zhang, Q., and Bai, Z., “Coordinating a supply chain for deteriorating items with a revenue sharing and cooperative investment contract”, *Omega*, 56 (2015) 37–49.